
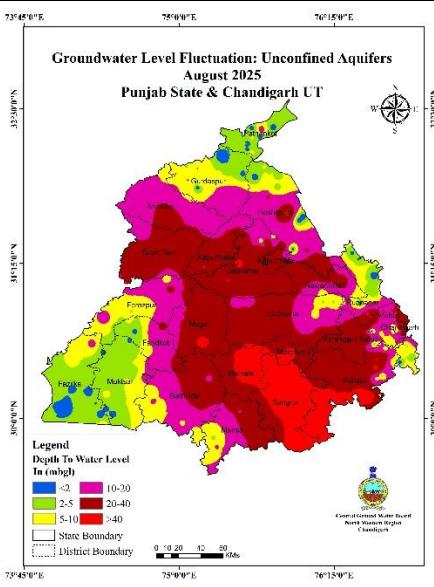


Percentage of Wells In Different Water Level Ranges In Unconfined Aquifers (August 2025)

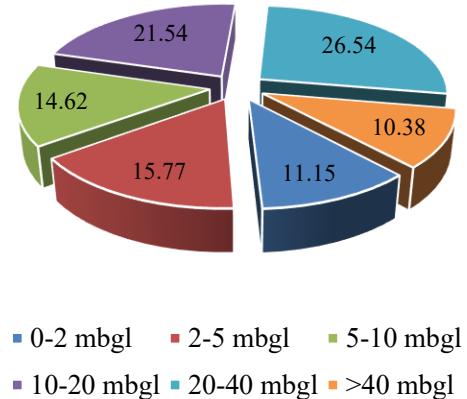

**GROUND WATER LEVEL
BULLETIN
PUNJAB STATE & CHANDIGARH UT
AUGUST 2025**

ABSTRACT

Ground water level Scenario during August 2025 highlighting the findings, status of ground water level in unconfined aquifers and its annual and decadal comparison.

CGWB, NORTH WESTERN REGION, CHANDIGARH

SUBMITTED BY

Sh. Ayush Kesharwani
Scientist 'B' (Hydrogeology) & OIC (RODC), CGWB, NWR,
Chandigarh

1.0 INTRODUCTION

Groundwater bulletin is prepared by CGWB depicting changes in groundwater regime of the country through different seasons. It is an effort to obtain information on groundwater levels through representative monitoring wells. The important attributes of groundwater regime monitoring are groundwater level.

The natural conditions affecting the groundwater regime involve climatic parameters like rainfall, evapotranspiration etc., whereas anthropogenic influences include groundwater pumping from the aquifers, recharge due to irrigation systems and other practices like waste disposal etc.

Groundwater levels are being measured by Central Ground Water Board four times a year during January, May, August and November. The regime monitoring started in the year 1969 by Central Groundwater Board. A network of 26,000 observation wells called **National Hydrograph Network Stations (NHNS)**, as on 30.04.2025, located all over the country is being monitored.

2.0 STUDY AREA

The Punjab State is located between North latitudes $29^{\circ} 32'$ and $32^{\circ} 28'$ and East longitudes $73^{\circ} 50'$ and $77^{\circ} 00'$. The total geographical area of the state is 50476 sq. km. It is surrounded by the states of Himachal Pradesh in the northeast, Jammu and Kashmir in the north and Haryana and Rajasthan in the south and southwest respectively. The State has a flat alluvial plain except a narrow belt along the southwestern parts where stable sand dunes are seen dotting the landscape. The area occupied by the mountains (Himalayan foothills) in northeast, is about 1243 sq km. Perennial Rivers Sutlej, Beas, Ravi and ephemeral river Ghaggar drain the state. It has a vast network of canal system. With the inception of canals, the fertile land of the State started converting into green fields and experienced spectacular achievement in agricultural production with emphasis on cultivation of paddy and high yielding varieties of crops, as a consequence demand for water increased manifold resulting in over exploitation of ground water resources.

The State has been divided into four main divisions viz. Jalandhar, Patiala,

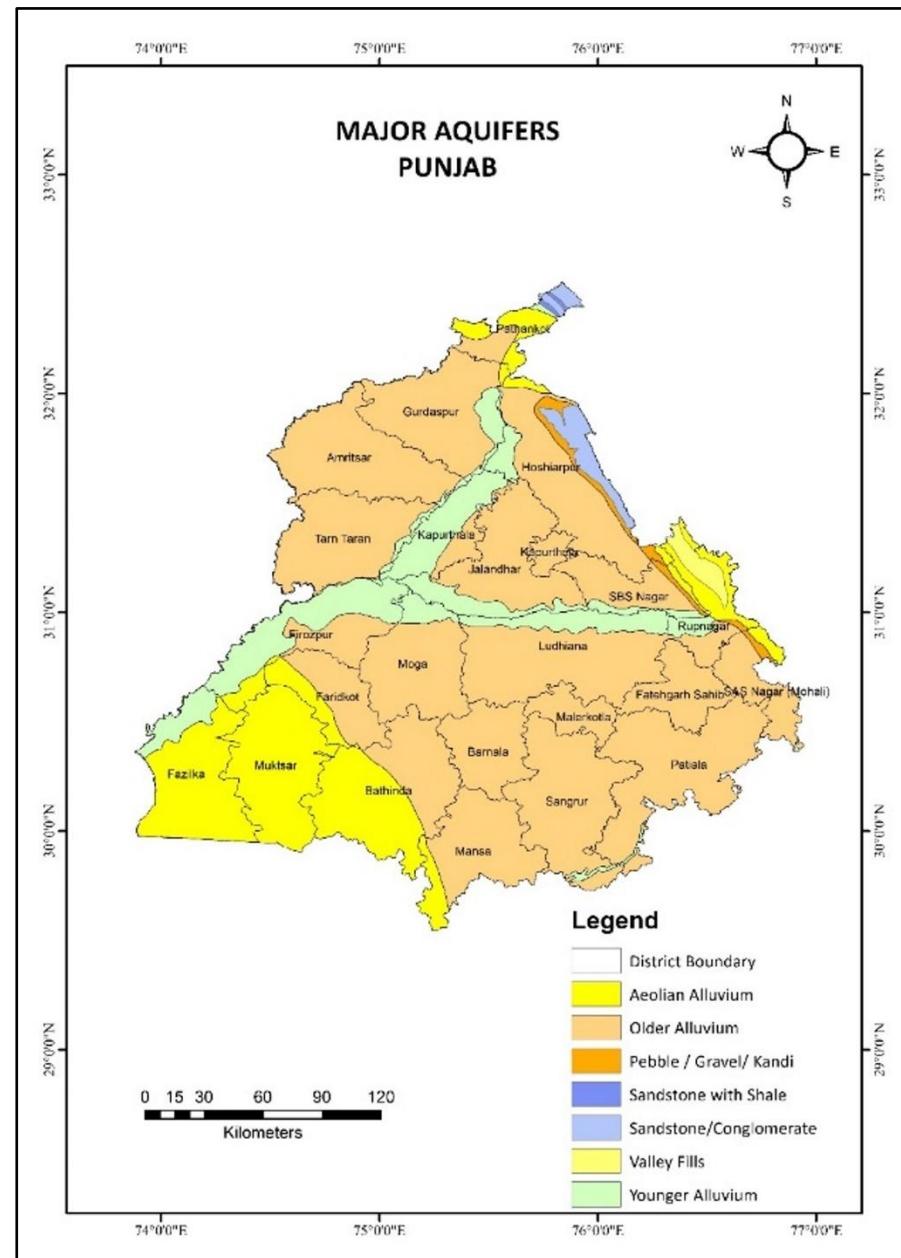


Figure-1: Map showing major aquifers and Hydrogeology of Punjab State & Chandigarh UT

Ferozpur and Faridkot, which are further sub-divided into 23 districts, which are further divided into 77 sub-divisions /tehsils and 146 community development.

The State forms a part of vast Indo-Genetic alluvial plain. Physiographically, the State can be divided into seven distinct units, which run parallel to each other.

I Hilly area: Siwalik Hills on the north and northeastern part.

II Eroded hills with flat land (Plateau): forms top of hills.

III Intermountain valleys

IV Piedmont area: (Kandi zone) immediately southwest of hills.

V. Sirowal Zone: lies further southwest of Kandi area which merges with the alluvium of Ravi, Beas, Sutlej and Ghaggar rivers. 2

VI. Alluvial plains:

- a)** Active/recent flood plains include meanders and present flood plains.
- b)** Abandoned flood plains include terraces of rivers, abandoned during Recent age.
- c)** Bar upland areas: Higher elevated land which remained beyond the reach of rivers but are composed of ancient river channels deposits (older alluvium) plains.

3.0 GROUND WATER LEVEL MONITORING

The Central Ground Water Board, North Western Region, has established 485 Ground water observation wells in Punjab State and Union Territory of Chandigarh for monitoring water level. As on 31.3.2025 there were 461 Ground Water Observation Wells of CGWB in Punjab which include 115 dug wells and 346 piezometers for monitoring shallow & deeper aquifers in Punjab. There are 24 observation wells in Chandigarh, 1 dug wells and 23 Piezometers for monitoring shallow & deeper aquifers.

About 80% of the Ground water observation wells fall in the canal command areas of various canal systems, the areas falling out of the major command is part of Pathankot, Hoshiarpur, Nawanshahr, Ropar and SAS Nagar districts, parts of Gurdaspur, Jalandhar and Ludhiana districts. The district wise details of Ground water observation wells are given in Table 1 and location of these Ground water observation wells is shown in Figure 2.

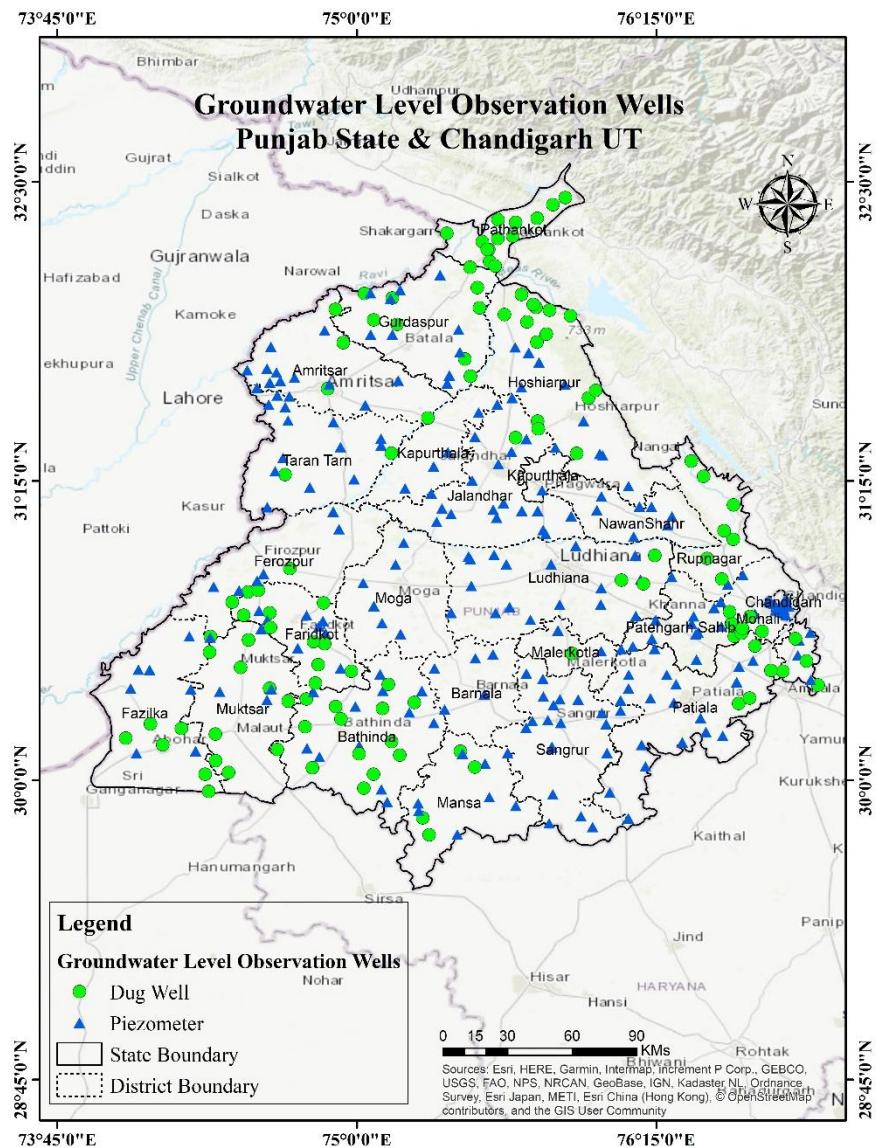


Figure- 2: Map showing locations of monitoring wells (NHNS) in Punjab State & Chandigarh UT

S. No.	Districts	Dug Wells	Piezometers	Total
1	Amritsar	4	23	27
2	Barnala	0	6	6
3	Bathinda	14	20	34
4	Faridkot	12	9	21
5	Fatehgarh Sahib	4	19	23
6	Fazilka	7	11	18
7	Ferozpur	2	13	15
8	Gurdaspur	9	20	29
9	Hoshiarpur	13	18	31
10	Jalandhar	2	38	40
11	Kapurthala	0	16	16
12	Ludhiana	3	29	32
13	Malerkotla	1	4	5
14	Mansa	4	12	16
15	Moga	0	8	8
16	Mohali	7	11	18
17	Muktsar	7	7	14
18	NawanShahr	0	7	7
19	Pathankot	13	0	13
20	Patiala	4	31	35
21	Rupnagar	7	1	8
22	Sangrur	0	27	27
23	Taran Tarn	2	16	18
24	Chandigarh UT	1	23	24
Total		116	369	485

Table 1: District-wise distribution of water level monitoring stations

4.0 RAINFALL

Rainfall in Punjab State and Chandigarh UT is predominantly influenced by the southwest monsoon, which accounts for nearly 70–80% of the total annual precipitation, occurring mainly between late June and September. The average annual rainfall exhibits significant spatial variability—ranging from about 400 mm in the arid southwestern districts such as Fazilka and Bathinda to over 1,000 mm in the sub-montane northern regions like Gurdaspur, Pathankot, and Ropar. Chandigarh, situated in the Shivalik foothills, receives comparatively higher rainfall, averaging around 1,100–1,200 mm annually. This variability plays a crucial role in groundwater recharge, with the central and southern regions of Punjab receiving insufficient rainfall to sustainably replenish aquifers. The high dependence on groundwater for irrigation, especially for water-intensive crops like paddy, coupled with declining and erratic rainfall patterns, has exacerbated groundwater depletion. Hence, a comprehensive understanding of rainfall distribution and trends is vital for developing sustainable groundwater management strategies in the region.

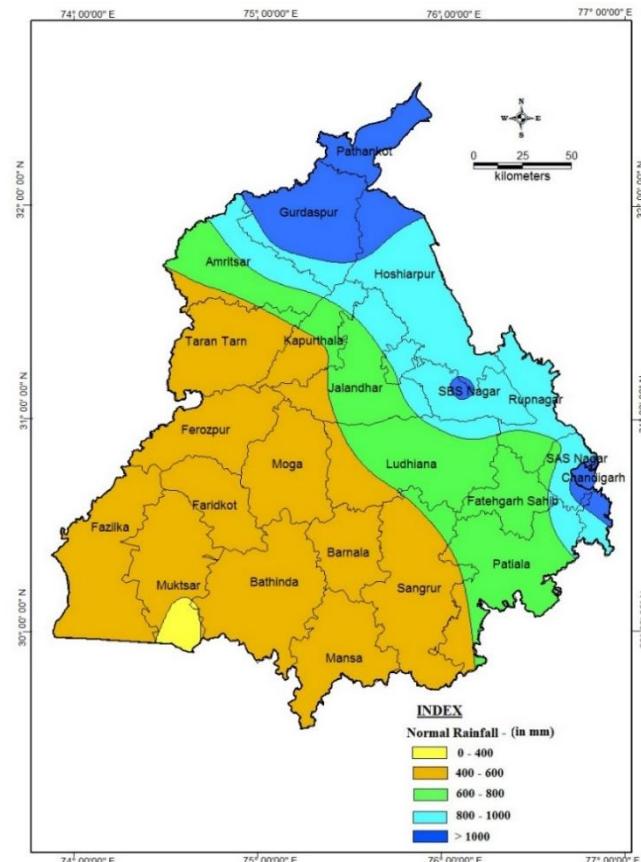


Figure-3: Isohyetal map of Normal Rainfall In Punjab State and Chandigarh UT.

District	Actual Rainfall (mm)	Normal (mm)	Departure (%)
Amritsar	50	48.9	+2
Barnala	88.2	51.3	+72
Bathinda	52.1	43.3	+20
Faridkot	101.6	50.1	+103
Fatehgarh Sahib	76.5	57.1	+34
Fazilka	39	32.5	+20
Ferozepur	56.1	30.6	+83
Gurdaspur	64.9	66.9	-3
Hoshiarpur	35.4	71	-50
Jalandhar	56.4	58.5	-4
Kapurthala	19.9	53.5	-63
Ludhiana	131.6	59.3	+122
Mansa	45.6	38.5	+18
Moga	65.5	45.2	+45
Muktsar	47.8	51	-6
Pathankot	148.5	83.8	+77
Patiala	97.6	65.2	+50
Rupnagar	180.4	98	+84
Sangrur	33.4	48.2	-31
SAS Nagar	59.4	93.2	-36
SBS Nagar	133	103.9	+28
Tarn Taran	62.7	24.2	+159
Chandigarh UT	1007.0	1061.0	+32.6

Table 2: District-wise rainfall (From June, 2025 to August, 2025) In Punjab State and Chandigarh UT.

5.0 GROUND WATER LEVEL SCENARIO (MAY, 2025)

5.1 UNCONFINED AQUIFER

5.1.1 DEPTH TO WATER LEVEL DATA

The behavioral pattern of water level in Aug 2025 along with depth to water level map (Fig.5) is discussed below.

The depth to water level lies between 0.16 mbgl in Dugwell in Village Sirsini, District S.A.S. Nagar, Punjab and 53.42 mbgl in Piezometer in Leisure Valley, Sector-10 (C) Chandigarh. Very shallow water levels of 0-2 m (causing water logging) occur in 11.15% of wells and 1.5% area of the state in isolated patches in Fazilka, Muktsar, Pathankot and Gurdaspur districts. Shallow water levels of 2-5 m have been observed in 15.77% of the wells and 12.97% of the total area that lies in South-Western and Northern parts of state i.e Fazilka, Muktsar, Rupnagar, Gurdaspur and Pathankot districts. The water levels between 5-10 m are observed in Fazilka, Ferozpur, Faridkot, Muktsar, Barnala, Mansa, Gurdaspur, Hoshiarpur, S.A.S. Nagar, Rupnagar and Chandigarh districts. About 14.62% of wells and 13.90% of the area fall in this range. Moderately Deep-water levels (10-20 m) are observed in 21.54% wells covering about 24.66% area of the State in Amritsar, Faridkot, Bathinda, Ferozpur, Hoshiarpur, Nawanshahr, Mansa and Ludhiana districts. Deep water levels (20-40 m) are observed in parts of Taran Taran, Bathinda, Mansa, Moga, Jalandhar, Kapurthala, Ludhiana, Patiala, Fatehgarh Sahib, Nawanshahr, Amritsar, Chandigarh and Sangrur districts and observed in 26.54% wells covering about 38.15% area of the state. Very deep-water levels (>40 m) are observed in 10.38% wells as patches in Sangrur, Barnala, Patiala, Malerkotla and Jalandhar districts covering 8.81% area of the State.

Percentage of Wells In Different Water Level Ranges In Unconfined Aquifers (August 2025)

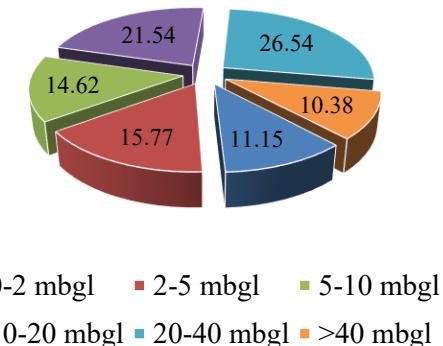


Figure-4: Percentage of wells in different water level ranges in unconfined aquifer.

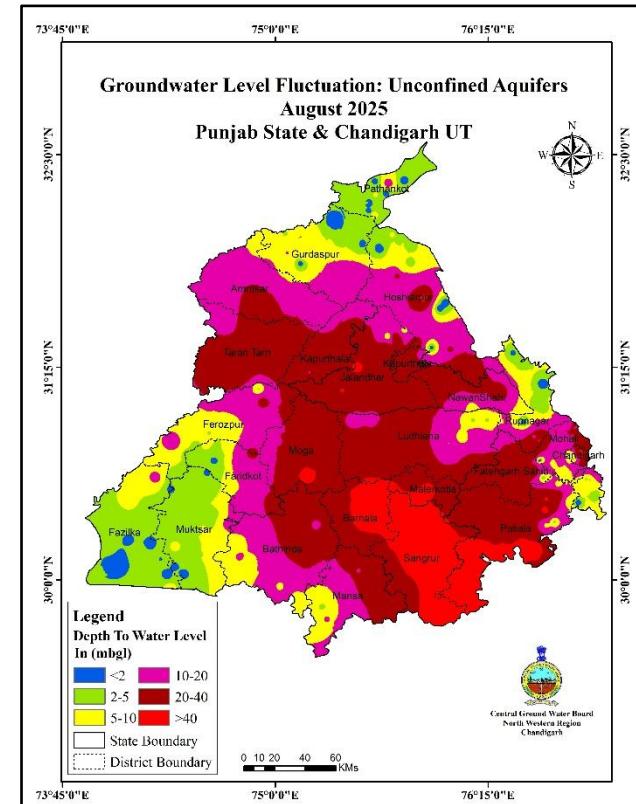


Figure-5: Depth to Water Level Map Unconfined Aquifer, August 2025

Wells Showing Rise & Fall In Annual Fluctuation
(Aug - 2024 : Aug - 2025)


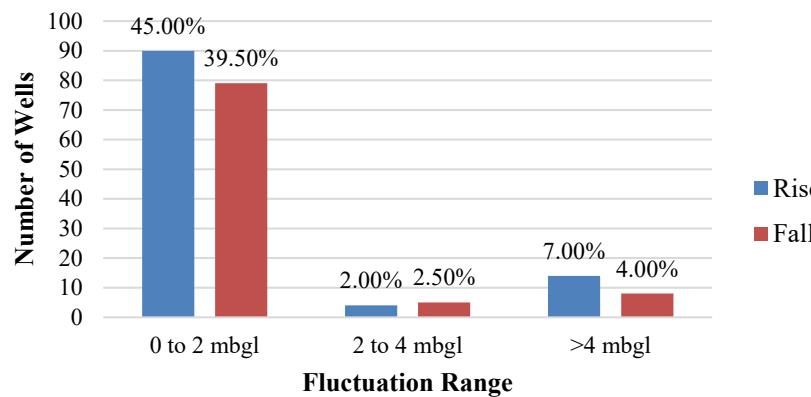


Figure-6: Percentage of wells showing rise and fall in WL in unconfined aquifer
(August 2024 to August 2025)

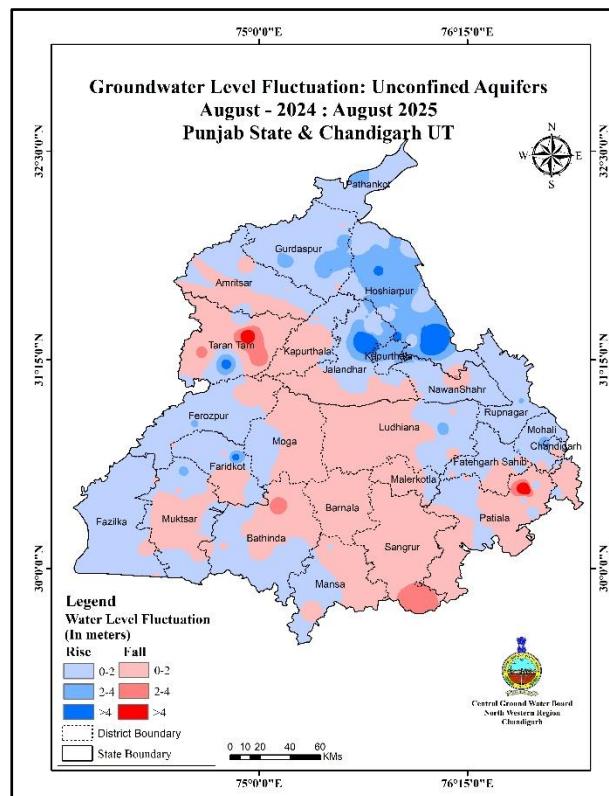

5.1.2 ANNUAL FLUCTUATION IN WATER LEVEL

Annual Fluctuation of Water Level in Unconfined Aquifer (August 2024 – August 2025)

In order to know the impact of rainfall and ground water withdrawal during last one-year, annual water level fluctuations for period August 2024 and August 2025 are calculated. The behavior of annual fluctuations is discussed in the following paragraph and depicted in Fig.7.

Rise in Water Levels:

The water level rise has been recorded in 54.00% of wells monitored and covering 55.09% area of the State. Water level rise in the range of 0-2 m is observed in 45.00% wells and 47.54% of area. Water level rise 2-4m is observed in 2.00% wells and 6.42% of area. The water level rise of >4m is observed in 7.00% wells and 1.12% of area as isolated patch in Tarn Taran, Faridkot, Hoshiarpur, Kapurthala and Jalandhar districts.

Fall in Water Levels:

The annual fluctuation depicts general decline of water levels in 46% of wells monitored and covering 44.91% area of the State. The decline has been observed in all districts of the state. Water level decline the range of 0-2 m is observed in 39.50% of wells and 43.03% of the area. Water level decline in the range of 2-4 m is observed in 2.50% of wells and 1.67% of the area. Whereas, the water level decline of >4m is observed in 4.00% of wells and less than 1% of the area during the period, as isolated patches in Tarn Taran and Patiala districts.

Figure-7: Annual water level fluctuation in unconfined aquifer(August 2024 to August 2025)

**Wells Showing Rise & Fall In Past Two Year Fluctuation
(Aug- 2023 : Aug - 2025)**

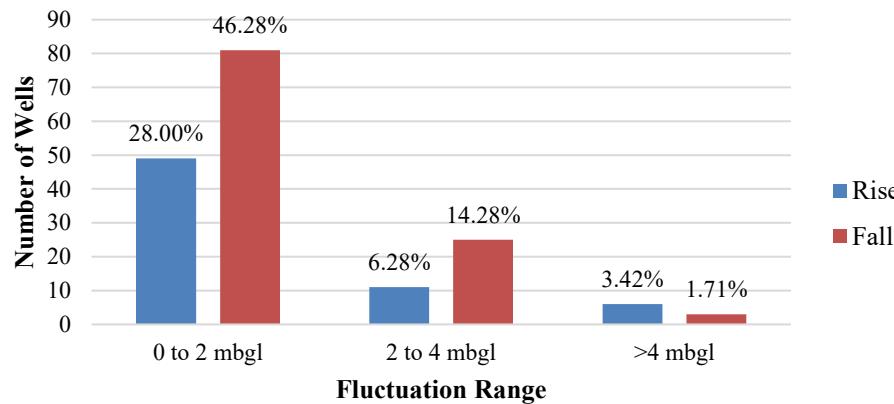


Figure-8: Percentage of wells showing rise and fall in WL in unconfined aquifers (Aug 2023 to Aug 2025)

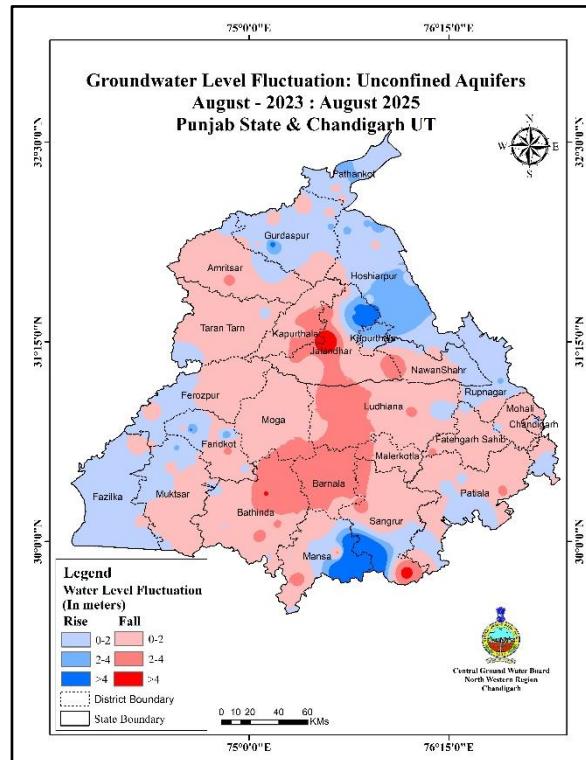


Figure-9: Water Level Fluctuation Map (Aug 2023 to Aug 2025)

Past Two-Year Fluctuation of Water Level in Unconfined Aquifer (August 2023 to August 2025)

In order to know the impact of rainfall and ground water withdrawal during last two years, past two-year water level fluctuations for period August 2023 and August 2025 are calculated. The behavior of annual fluctuations is discussed in the following paragraph and depicted in Fig.9.


Rise in Water Levels

The water level rise has been recorded in 37.7% of wells monitored and covering 35.40% area of the State. Water level rise in the range of 0-2 m is observed in 28.00% wells and 29.49% of area. Water level rise 2-4m is observed in 6.28% wells and 3.93% of area. The water level rise of >4m is observed in 3.42% of the wells and 1.98% of area distributed as isolated patches in Mansa, Sangrur, Hoshiarpur and Jalandhar districts of Punjab State.


Fall in Water Levels

The annual fluctuation depicts general decline of water levels in 62.3% of wells monitored and covering 64.60% area of the State. The decline has been observed in all districts of the state. Water level decline the range of 0-2 m is observed in 46.28% of wells and 52.51% of the area. Water level decline in the range of 2-4 m is observed in 14.28% of wells and 11.67% of the area. Whereas, the water level decline of >4m is observed in 1.71% of wells and less than 1% of the area during the period, as isolated patches in Jalandhar and Sangrur districts.

**Wells Showing Rise & Fall In Seasonal Fluctuation
(May, 2025 to Aug, 2025)**

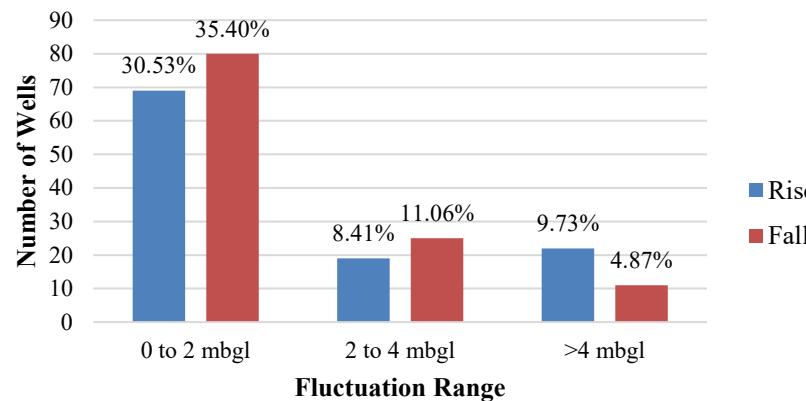

**Figure-6: Percentage of wells showing rise and fall in WL in unconfined aquifer
(May2025 to Aug 2025)**

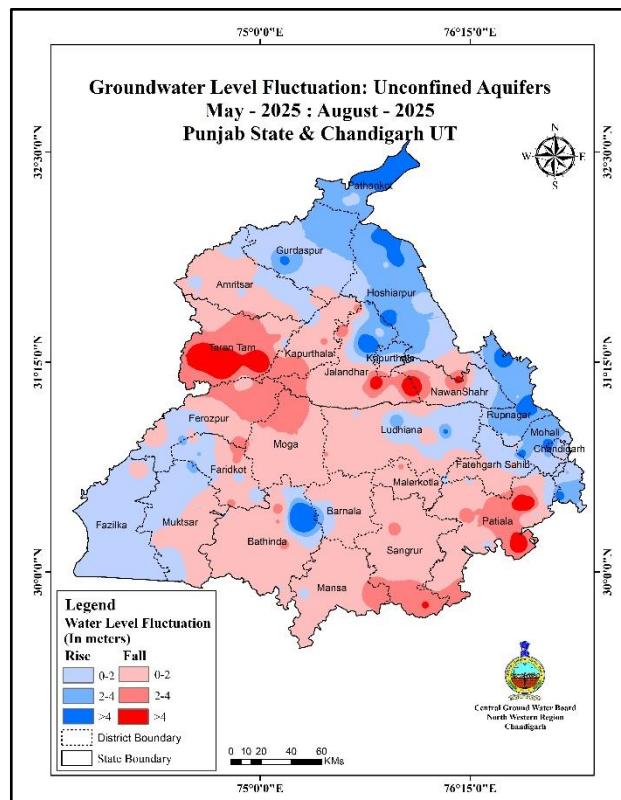

5.1.3 SEASONAL FLUCTUATION IN WATER LEVEL

Annual Fluctuation of Water Level in Unconfined Aquifer (May 2025 – August 2025)

In order to know the impact of rainfall and ground water withdrawal since last monitoring season, seasonal water level fluctuations for period May 2025 and August 2025 are calculated. The behavior of annual fluctuations is discussed in the following paragraph and depicted in Fig.7.

Rise in Water Levels:

The water level rise has been recorded in 48.67% of wells monitored and covering 39.63% area of the State. Water level rise in the range of 0-2 m is observed in 30.53% wells and 24.98% of area. Water level rise 2-4m is observed in 8.41% wells and 11.65% of area. The water level rise of >4m is observed in 9.73% wells and 3% of area as isolated patch in Pathankot, Bathinda, Rupnagar, Hoshiarpur, Chandigarh Kapurthala and Jalandhar districts.

Fall in Water Levels:

The annual fluctuation depicts general decline of water levels in 51.33% of wells monitored and covering 60.37% area of the State. The decline has been observed in all districts of the state. Water level decline in the range of 0-2 m is observed in 35.40% of wells and 46.95% of the area. Water level decline in the range of 2-4 m is observed in 11.06% of wells and 11.20% of the area. Whereas, the water level decline of >4m is observed in 4.87% of wells and 2.22% of the area during the period, as isolated patches in Tarn Taran and Patiala districts.

Figure-7: Annual water level fluctuation in unconfined aquifer(May 2025 to Aug 2025)

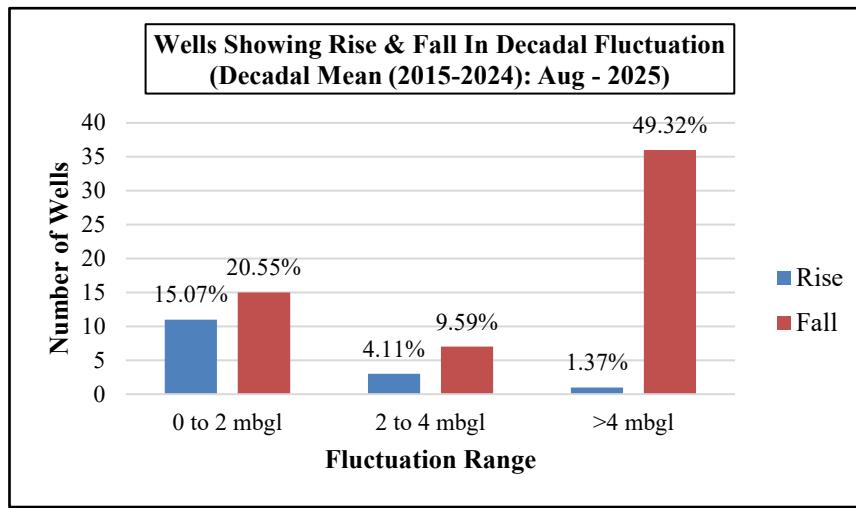


Figure-10: Percentage of wells showing rise and fall in WL in unconfined Aquifer (Decadal Mean Aug (2015-2024) to Aug 2025)

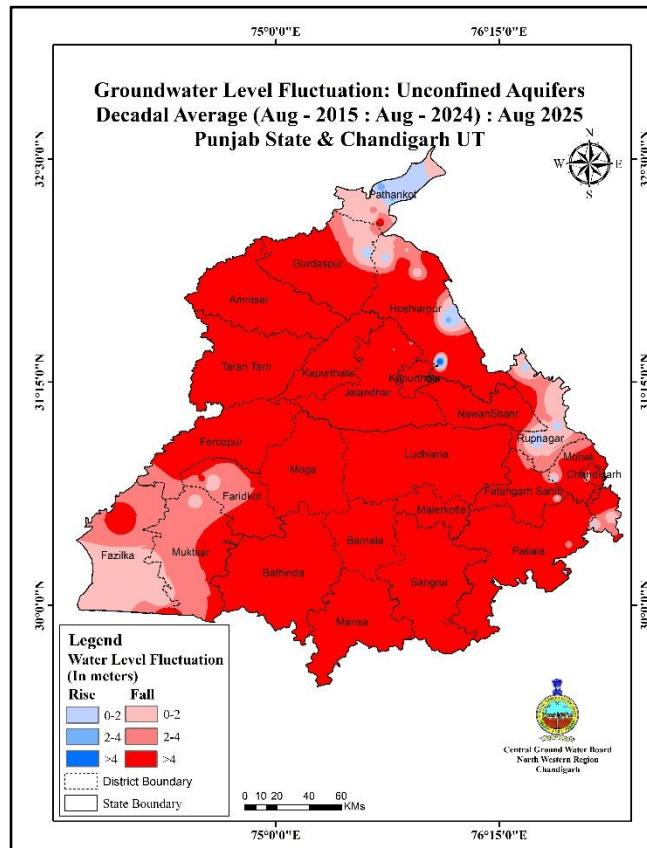


Figure-11: Water level fluctuation in unconfined Aquifer(Decadal Mean Aug (2015-2024) to Aug 2025)

5.1.4 DECADAL FLUCTUATION IN WATER LEVEL

Decadal Fluctuation of Water Level in Unconfined Aquifer Decadal Mean (2015-2024): August - 2025

Changes in water level behavior since last one decade are determined using decadal mean data. Water level mean of past one decade (2015-2024) for each ground water observation well is computed and compared with the respective water level data of August 2025. The behavior of water level over the period under reference is discussed in paragraph below along with Fig.11.

Rise in Water Levels:

The decadal mean fluctuations show that rise in 20.55% of observation wells monitored covering about 1.49% area of the state. Water level rise in the range of 0-2 m is observed in 15.07% of wells and 1.40% of the area. Water level rise of 2-4m is observed in 4.11% of wells and less than 1% of the area. Water level rise of >4m is observed in 1.37% of wells and less than 1% of the state area as isolated patch in Hoshiarpur district.

Fall in Water Levels:

The decadal mean fluctuations show that decline in 79.45% of observation wells monitored covering about 98.51% area of the state. The decline has been observed in all districts of the state. The decline of 0-2 m has been observed in about 20.55% of wells and 7.25% of area. Water level decline of 2-4 m is observed in 9.59% of the wells and 10.46% of the area. Water level decline of >4m is observed in 49.32% of the wells and 80.80% of area during the period, in almost all the districts of Punjab State and Chandigarh UT except Pathankot district.

6.0 SUMMARY

The Groundwater Level Bulletin for Punjab State & Chandigarh UT, published by the Central Ground Water Board, North Western Region, Chandigarh presents an assessment of the groundwater scenario as of August 2025, focusing on unconfined aquifers and comparing annual and decadal trends. Groundwater monitoring across 485 observation wells reveals significant spatial variations in water table depths, ranging from 0.16 meter to over 53.42 meters below ground level. Annual and two-year analyses indicate a general decline in groundwater levels across more than half the state, with localized rises in certain districts. The decadal comparison shows even grave situation, with over 85% of wells recording declining levels, though some areas exhibit improvement. Rainfall variability, excessive groundwater extraction for irrigation, and limited recharge are major contributing factors. To address this, recommendations include a mix of demand-side measures like crop diversification and smart irrigation, alongside supply-side strategies such as artificial recharge, wastewater reuse, and rainwater harvesting.

7.0 RECOMMENDATIONS

The declining trend of ground water level in Punjab State & Chandigarh UT can be improved by Demand and Supply-Side Interventions for Water Conservation which are as given below:

1. Demand Side Interventions

- Change in Paddy Variant – Switching from PUSA-44 (150 days maturity) to PR-126 (117 days maturity) can save 25% of groundwater.
- Use of AI and Tensiometers – AI-based irrigation and tensiometers help optimize water usage, reducing irrigation needs from 1102 mm/acre to 820 mm/acre.
- Reduction of Standing Water Column – Lowering the water column from 145 cm to 120 cm in rice cultivation reduces water consumption.

2. Supply Side Interventions

- Artificial recharge structures in government buildings can aid groundwater conservation. Lining of Unlined Channels – Converting unlined irrigation channels to lined ones can reduce groundwater overdraft.
- Underground Pipelines – Expanding underground pipeline coverage can decrease groundwater development.
- Canal Water for Irrigation – Maximizing canal water usage can improve groundwater recharge and reduce dependence on groundwater.
- Artificial Recharge in Paleochannels – Excavating ponds and constructing recharge trenches in paleochannels can enhance groundwater recharge.
- Reuse of Wastewater – Treating and reusing pond water through the 3-pond system or Thapar model, with solar-powered lifting, helps conserve groundwater.
- Construction of Injection Wells – Injection wells at minor canal outlets can use surplus canal water to recharge groundwater.
- Rainwater Harvesting – Installing rainwater harvesting structure after sufficient scientific study.